


Description

The PESDLC553T5VU is a TVS array designed to protect I/O or data lines from the damaging effects of ESD. It is low capacitance transient voltage suppressors for high speed data interface that designed to protect sensitive electronics from damage or latch-up due to ESD lightning, and other voltage induced transient events. The SOT-553 is a very small package which allows space saving on high density printed circuit board and also gives the designer the flexibility to provide four I/O lines protection. All pins are rated to withstand 15kV ESD pulses using the IEC61000-4-2 air discharge method, which can meet the requirement of level 4.

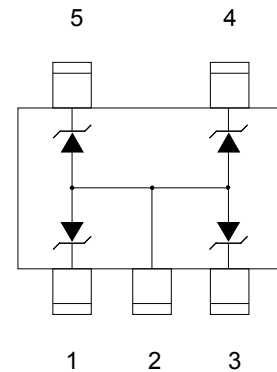

Feature

- SOT-553 package
- Protects three bidirectional lines and four Unidirectional lines
- Low clamping voltage
- Working voltage: 5V
- Low leakage current
- ESD protection > 15kV
- Monolithic structure
- RoHS compliant
- 100W peak pulse power(tp=8/20us)
- Complies with the following standards: IEC 61000-4-2(ESD)air±15kV,contact±8V

Applications


- Communication systems & cellular phones
- Printers
- Notebook and hand hold computers
- PDAs
- Video equipment

Mechanical Characteristics

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260℃
- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness : ≤3mil

Electronics Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance
I_F	Forward Current
V_F	Forward Voltage @ I_F

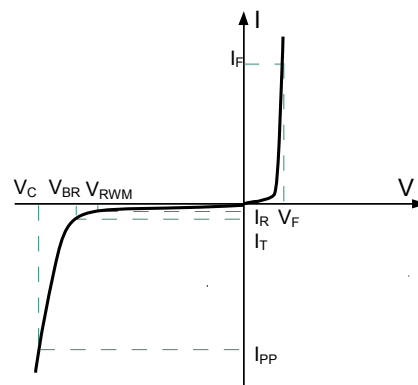

Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	6.1	6.7	7.2	V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$ $T=25^\circ\text{C}$		0.005	1	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$ $t_p = 8/20\mu\text{S}$			8.8	V
Clamping Voltage	V_C	$I_{PP}=3\text{A}$ $t_p = 8/20\mu\text{S}$			11.8	V
Junction Capacitance	C_j	$V_R=0\text{V}$ $f = 1\text{MHz}$		10	14	pF

Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu\text{s}$)	P_{pp}	100	W
Forward voltage@10mA	V_F	1.5	V
Operating Temperature	T_J	-55 to +125	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +125	$^\circ\text{C}$

Note: Pin 1, 3, 4, 5 to Pin 2

Typical Characteristics

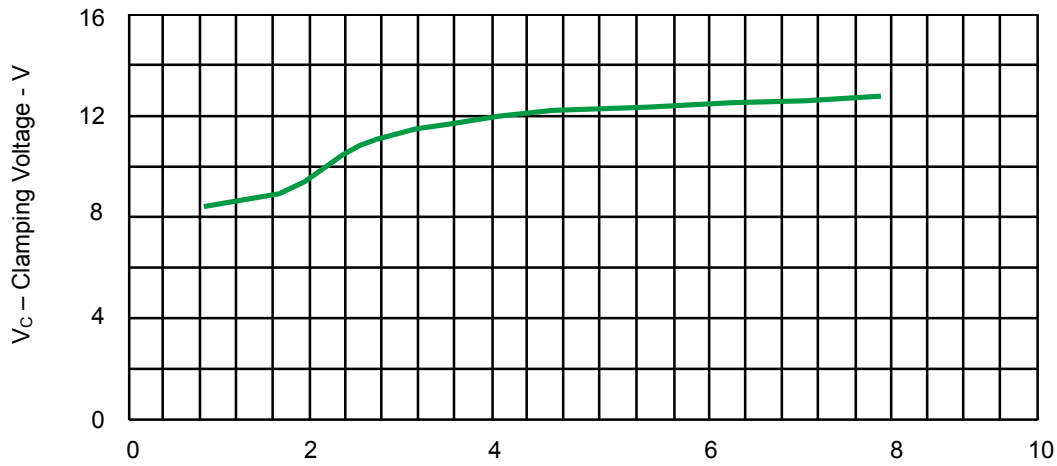


Fig.1 Typical Clamping Voltage VS Peak Pulse Current for PESDLC553T5VU

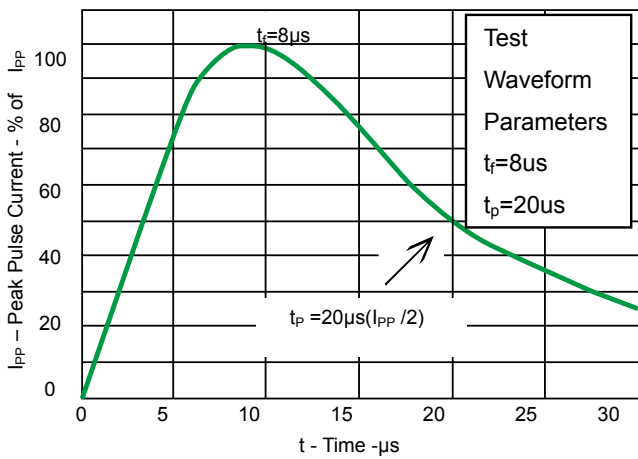


Fig 2.Pulse Waveform


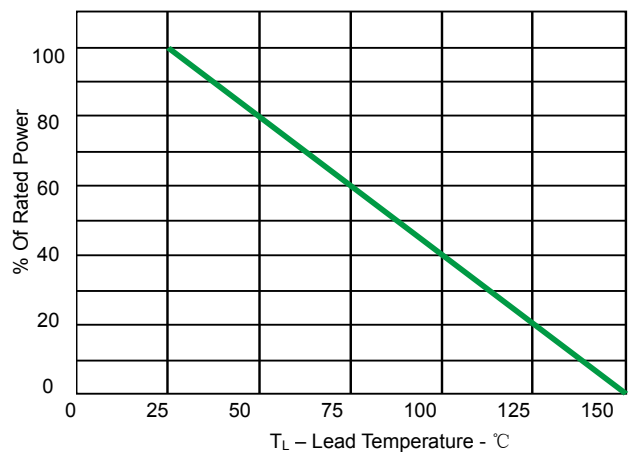


Fig 3.Power Derating Curve

Solder Reflow Recommendation

Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

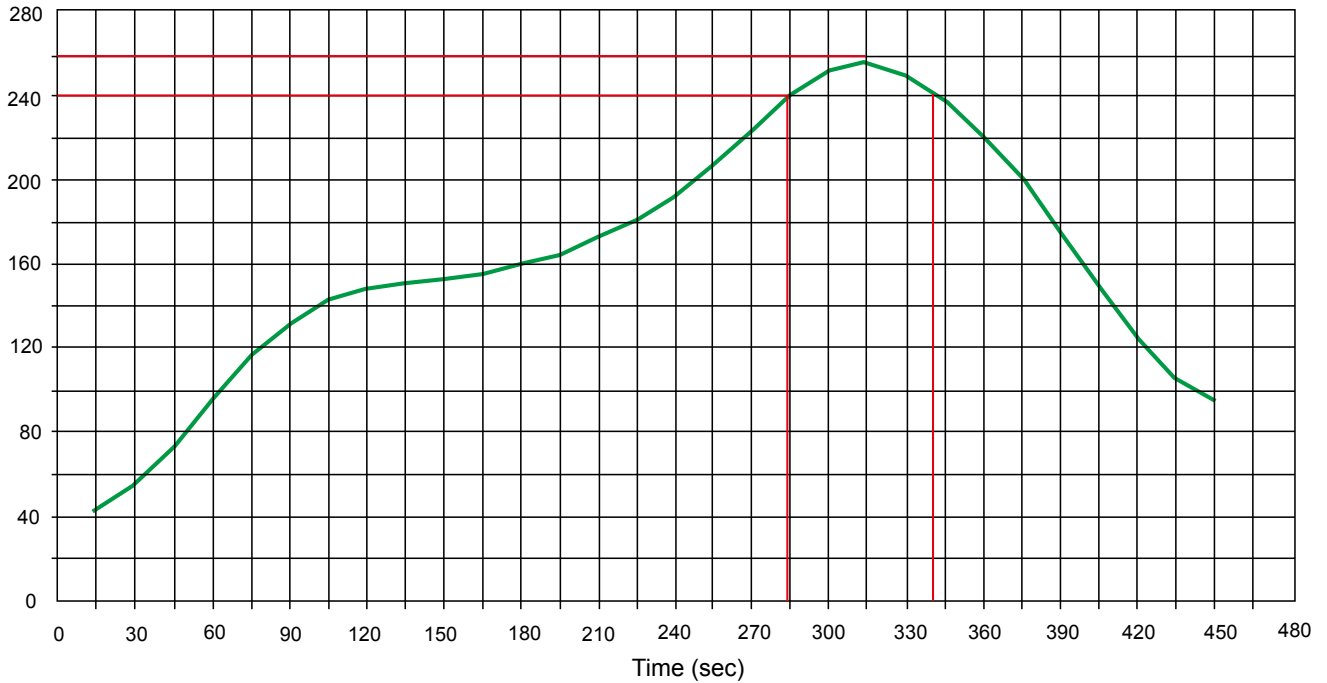


PCB Design


For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:

- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.

Product dimension (SOT-553)

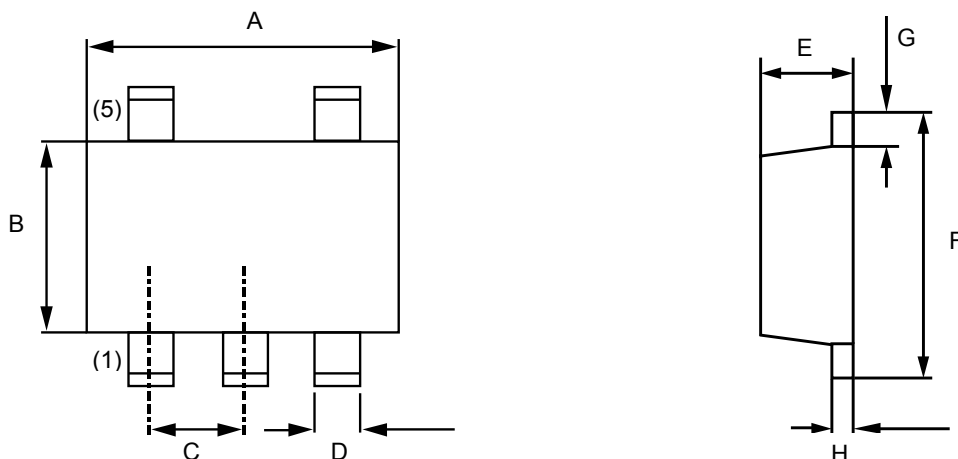

Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	1.50	1.70	0.059	0.067
B	1.10	1.30	0.043	0.051
C	0.50BSC		0.020BSC	
D	0.17	0.27	0.007	0.011
E	0.50	0.60	0.020	0.024
F	1.50	1.70	0.059	0.067
G	0.10	0.30	0.004	0.012
H	0.08	0.16	0.003	0.006

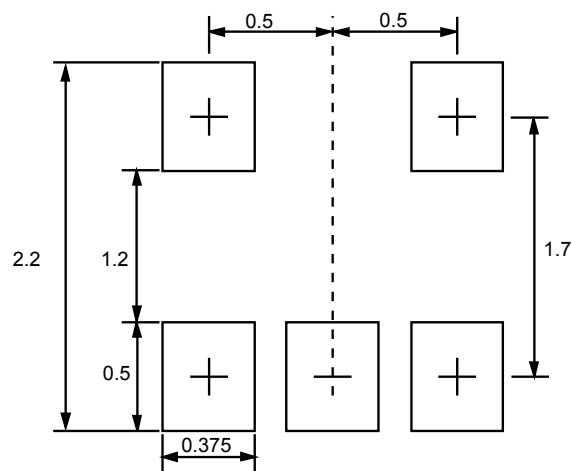


Unit:mm

Ordering information

Device	Package	Shipping
PESDLC553T5VU	SOT-553 (Pb-Free)	3000 / Tape & Reel


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.